

FORM PTO-1390
(REV. 9-2001)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

**TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371**

2.M815.1

U.S. APPLICATION NO. (If known, see 37 CFR 1.5

10/030372

INTERNATIONAL APPLICATION NO.
PCT/IB00/00546

INTERNATIONAL FILING DATE
April 28, 2000

PRIORITY DATE CLAIMED
October 29, 2001

TITLE OF INVENTION

FLUX SWITCHING LINEAR MOTOR

APPLICANT(S) FOR DO/EO/US

GREHANT Bernard

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (21) indicated below.
4. ☒ The US has been elected by the expiration of 19 months from the priority date (Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☒ is attached hereto (required only if not communicated by the International Bureau).
 - b. ☐ has been communicated by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
 - a. ☒ is attached hereto.
 - b. ☐ has been previously submitted under 35 U.S.C. 154(d)(4).
7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
 - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
 - b. ☐ have been communicated by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371 (c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ An English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11 to 20 below concern document(s) or information included:

11. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A **FIRST** preliminary amendment.
14. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
15. ☐ A substitute specification.
16. ☐ A change of power of attorney and/or address letter.
17. ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.
18. ☐ A second copy of the published international application under 35 U.S.C. 154(d)(4).
19. ☐ A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).
20. ☒ Other items or information:
 - copy: International Search Report
 - copy: International Preliminary Examination Report
 - Return Postcard

21. ☒ The following fees are submitted:**BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)):**Neither international preliminary examination fee (37 CFR 1.482)
nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO
and International Search Report not prepared by the EPO or JPO. **\$1040.00**International preliminary examination fee (37 CFR 1.482) not paid to
USPTO but International Search Report prepared by the EPO or JPO **\$890.00**International preliminary examination fee (37 CFR 1.482) not paid to USPTO
but international search fee (37 CFR 1.445(a)(2)) paid to USPTO **\$740.00**International preliminary examination fee (37 CFR 1.482) paid to USPTO
but all claims did not satisfy provisions of PCT Article 33(1)-(4) **\$710.00**International preliminary examination fee (37 CFR 1.482) paid to USPTO
and all claims satisfied provisions of PCT Article 33(1)-(4) **\$100.00****ENTER APPROPRIATE BASIC FEE AMOUNT =**

CALCULATIONS PTO USE ONLY

\$ 890.00

Surcharge of **\$130.00** for furnishing the oath or declaration later than ☐ 20 ☐ 30
months from the earliest claimed priority date (37 CFR 1.492(e)).

\$

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	
Total claims	20 - 20 =	0	x \$18.00	\$
Independent claims	- 3 =		x \$84.00	\$

\$

\$

MULTIPLE DEPENDENT CLAIM(S) (if applicable)

+ \$280.00

\$ 280.00

TOTAL OF ABOVE CALCULATIONS =

\$ 1170.00

☒ Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above
are reduced by 1/2.

\$ 585.00

+

SUBTOTAL =

\$

Processing fee of **\$130.00** for furnishing the English translation later than ☐ 20 ☐ 30
months from the earliest claimed priority date (37 CFR 1.492(f)).

\$

TOTAL NATIONAL FEE =

\$

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be
accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). **\$40.00** per property +

\$

TOTAL FEES ENCLOSED =

\$ 585.00

Amount to be
refunded:

\$

charged:

\$

- a. ☐ A check in the amount of \$ _____ to cover the above fees is enclosed.
- b. ☒ Please charge my Deposit Account No. 50-0800 in the amount of \$ 585.00 to cover the above fees.
A duplicate copy of this sheet is enclosed.
- c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any
overpayment to Deposit Account No. 50-0800. A duplicate copy of this sheet is enclosed.
- d. ☐ Fees are to be charged to a credit card. **WARNING:** Information on this form may become public. **Credit card
information should not be included on this form.** Provide credit card information and authorization on PTO-2038.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR
1.137 (a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

John MOETTELI
c/o BUGNION S.A.
10, route de Florissant
C.P. 375
1211 GENEVA 12
SWITZERLAND

SIGNATURE

John MOETTELI

NAME

35,289

REGISTRATION NUMBER

Docket No 2.M815.1

IN THE UNITED STATES PATENT OFFICE

International Application	§	Applicant : Bernard GREHANT
No : PCT/IB00/00546	§	
	§	
International Filing Date :	§	Title of Invention : FLUX SWITCHING
April 28, 2000	§	LINEAR MOTOR
	§	
Priority Date :	§	Authorized Officer
April 29, 1999	§	

PRELIMINARY AMENDMENT

BOX PCT
Attn. : National Stage
Commissioner of Patents and Trademarks
Washington, D.C. 20231

Dear Sirs,

Together with PCT National Stage filing documents, Applicant requests that the preliminary amendment amending claims 1-12 and adding claims 13-20 as set forth below be entered.

In the claims :

1. (amended) A flux-switching linear motor with at least two phases (P1, P2, P3),
[consisting of] comprising a moving rig [comprising] having
 - a. at least two field coils (7) each surrounding a magnetic armature (8)
defining moving magnetic poles, and
 - b. two permanent magnets (9, 10) magnetized in opposite [senses,] directions,
transverse to the axis of a guidance stator tube (1), the stator tube having
[exhibiting] magnetic poles (2) disposed along [the stator tube, on] at least

one wall of the stator tube [in such a way] so as to be successively facing the moving magnetic poles during the travel of the moving rig, and

- c. [of] means for switching the [sense] direction of the current in the coils, wherein [characterized in that] the permanent magnets (9, 10) are disposed outside the coils and [in that they are] magnetized along an axis parallel to the axis of the coil, and [in that] the stator magnetic poles [(2) consist of] comprise pieces (2) made of magnetic material fixed in a guidance tube made of amagnetic material, the dimension of the magnets as measured along their magnetic axis being chosen [in such a way] so as to create narrow gaps to allow [for the] movement of the magnets past the stator poles.

2. (amended) The motor as claimed in claim 1, [characterized in that] wherein the pole pieces (2) [constituting] of the stator poles are fixed according to pairs [pairwise], on either side of the axis of the [guidance] stator tube (1), on two opposite walls thereof [of the stator tube] and [in that] the dimension of the magnets (9, 10) corresponds to the distance separating two opposite [stator] pole pieces.
3. (amended) The motor as claimed in claim 2, [characterized in that] wherein the magnets of opposite polarity which relate to a phase are disposed symmetrically with respect to the plane containing the axis of the coil and [a] perpendicular to the axis of the stator tube, that is to say disposed in front of and behind the coil in the direction of motion.
4. (amended) The motor as claimed in claim 2, [characterized in that] wherein the magnets of opposite polarity which relate to a phase are disposed symmetrically with respect to the plane containing the axis of the coil and the axis of the stator tube.

5. (amended) The motor as claimed in one of claims 2 to 4, [characterized in that] wherein the guidance tube (1) [consists of] comprises a rectangular U-profile member on two opposite internal walls of which are fixed lugs or pads (2) made of magnetic material constituting the stator poles.
6. (amended) The two-phase motor with two coils as claimed in one of claims 1 to [5] 4, [characterized in that] wherein the axes of the coils are offset by a quarter or three quarters of a spacing relative to the stator spacing defined by the distance between the positions of two consecutive stator pole pieces.
7. (amended) The three-phase motor with three coils as claimed in one of claims 1 to [5] 4, [characterized in that] wherein the axes of the coils are offset by a third or two thirds of a spacing relative to the stator spacing defined by the distance between the positions of two consecutive stator pole pieces.
8. (amended) The motor as claimed in one of claims 2 to [5] 4, [characterized in that] wherein the subassemblies constituting each of the phases are articulated (14) together.
9. (amended) The motor as claimed in one of claims 1 to [7] 4, [characterized in that] wherein two consecutive phases share a common magnet.
10. (amended) The motor as claimed in one of claims 1 to [9] 4, [characterized in that] wherein the moving rig is supplied with DC current and that the means for switching the current are mounted on the moving rig.
11. (amended) The motor as claimed in one of claims 1 to [10] 4, [characterized in that] wherein the moving rig contains, parallel to the axis of the coils, feedthroughs (17) made of soft ferromagnetic material.

12. (amended) The motor as claimed in claim 1, [characterized in that] wherein the moving rig comprises a magnetic short-circuit plate made of a soft ferromagnetic material (18) disposed on the face of the moving rig, parallel and opposite to the stator poles (2) in such a way as to create an image (2') of the stator poles.
13. (new claim) The two-phase motor with two coils as claimed in claim 5, wherein the axes of the coils are offset by a quarter or three quarters of a spacing relative to the stator spacing defined by the distance between the positions of two consecutive stator pole pieces.
14. (new claim) The three-phase motor with three coils as claimed in claim 5, wherein the axes of the coils are offset by a third or two thirds of a spacing relative to the stator spacing defined by the distance between the positions of two consecutive stator pole pieces.
15. (new claim) The motor as claimed in claim 5, wherein the subassemblies constituting each of the phases are articulated (14) together.
16. (new claim) The motor as claimed in claim 5, wherein two consecutive phases share a common magnet.
17. (new claim) The motor as claimed in claim 16, wherein the moving rig is supplied with DC current and that the means for switching the current are mounted on the moving rig.
18. (new claim) The motor as claimed in one of claim 17, wherein the moving rig contains, parallel to the axis of the coils, feedthroughs (17) made of soft ferromagnetic material.

19. (new claim) The motor as claimed in claim 6, wherein two consecutive phases share a common magnet.

20. (new claim) The motor as claimed in claim 6, wherein the moving rig is supplied with DC current and that the means for switching the current are mounted on the moving rig.

A set of replacement claims is attached.

In the Abstract :

Please add the attached abstract to the specification as page 22.

In the Specification :

On page 1, between the title and the first paragraph, please insert the subtitle : **Background of the Invention**

On page 1, after line 13, add the following subtitle : **Prior Art**

On page 3, line 25, please replace “The aim of the present invention is to remedy” with –What is needed is a device that remedies—

On page 3, line 26, please replace “, that is to say” with – In particular, what is needed is a way --.

On page 3, after line 29, add the following subtitle : **Summary of the Invention**

On page 5, on line 25, add the following subtitle : **Brief Description of the Drawings**

On page 6, after the last line, add the following subtitle : **Detailed Description of the Preferred Embodiment(s)**

On page 7, please replace “We refer to Figures 1 to 3. The” with – Referring now to Figures 1 to 3, the--


On page 17, after the last paragraph, add the following paragraph :

--Although illustrative embodiments of the invention have been shown and described, a wide range of modification, change and substitution is contemplated in the foregoing disclosure and in some instances, some features of the present invention may be employed without a corresponding use of the other features. Accordingly, it is appropriate that the appended claims be construed broadly and in a manner consistent with the scope of the invention.--

§ § §

Replacement sheets are enclosed herewith, numbered to correspond to the numbers of the original application which the replacement sheets replace.

Respectfully submitted,



John MOETELI
Reg. No. 35,289
c/o BUGNION S.A.
10, route de Florissant
P.O. Box 375
1211 GENEVE 12
SWITZERLAND

Date : October 18, 2001

In the claims :

1. A flux-switching linear motor with at least two phases (P1, P2, P3), comprising a moving rig having
 - a. at least two field coils (7) each surrounding a magnetic armature (8) defining moving magnetic poles, and
 - b. two permanent magnets (9, 10) magnetized in opposite directions, transverse to the axis of a guidance stator tube (1), the stator tube having magnetic poles (2) disposed along at least one wall of the stator tube so as to be successively facing the moving magnetic poles during the travel of the moving rig, and
 - c. means for switching the direction of the current in the coils, wherein the permanent magnets (9, 10) are disposed outside the coils and magnetized along an axis parallel to the axis of the coil, and the stator magnetic poles comprise pieces (2) made of magnetic material fixed in a guidance tube made of amagnetic material, the dimension of the magnets as measured along their magnetic axis being chosen so as to create narrow gaps to allow movement of the magnets past the stator poles.
2. The motor as claimed in claim 1, wherein the pole pieces (2) of the stator poles are fixed according to pairs, on either side of the axis of the stator tube (1), on two opposite walls thereof and the dimension of the magnets (9, 10) corresponds to the distance separating two opposite pole pieces.
3. The motor as claimed in claim 2, wherein the magnets of opposite polarity which relate to a phase are disposed symmetrically with respect to the plane containing the axis of the coil and perpendicular to the axis of the stator tube, that is to say disposed in front of and behind the coil in the direction of motion.

4. The motor as claimed in claim 2, wherein the magnets of opposite polarity which relate to a phase are disposed symmetrically with respect to the plane containing the axis of the coil and the axis of the stator tube.
5. The motor as claimed in one of claims 2 to 4, wherein the guidance tube (1) comprises a rectangular U-profile member on two opposite internal walls of which are fixed lugs or pads (2) made of magnetic material constituting the stator poles.
6. The two-phase motor with two coils as claimed in one of claims 1 to 4, wherein the axes of the coils are offset by a quarter or three quarters of a spacing relative to the stator spacing defined by the distance between the positions of two consecutive stator pole pieces.
7. The three-phase motor with three coils as claimed in one of claims 1 to 4, wherein the axes of the coils are offset by a third or two thirds of a spacing relative to the stator spacing defined by the distance between the positions of two consecutive stator pole pieces.
8. The motor as claimed in one of claims 2 to 4, wherein the subassemblies constituting each of the phases are articulated (14) together.
9. The motor as claimed in one of claims 1 to 4, wherein two consecutive phases share a common magnet.
10. The motor as claimed in one of claims 1 to 4, wherein the moving rig is supplied with DC current and that the means for switching the current are mounted on the moving rig.

11. The motor as claimed in one of claims 1 to 4, wherein the moving rig contains, parallel to the axis of the coils, feedthroughs (17) made of soft ferromagnetic material.
12. The motor as claimed in claim 1, wherein the moving rig comprises a magnetic short-circuit plate made of a soft ferromagnetic material (18) disposed on the face of the moving rig, parallel and opposite to the stator poles (2) in such a way as to create an image (2') of the stator poles.
13. The two-phase motor with two coils as claimed in claim 5, wherein the axes of the coils are offset by a quarter or three quarters of a spacing relative to the stator spacing defined by the distance between the positions of two consecutive stator pole pieces.
14. The three-phase motor with three coils as claimed in claim 5, wherein the axes of the coils are offset by a third or two thirds of a spacing relative to the stator spacing defined by the distance between the positions of two consecutive stator pole pieces.
15. The motor as claimed in claim 5, wherein the subassemblies constituting each of the phases are articulated (14) together.
16. The motor as claimed in claim 5, wherein two consecutive phases share a common magnet.
17. The motor as claimed in claim 16, wherein the moving rig is supplied with DC current and that the means for switching the current are mounted on the moving rig.

18. The motor as claimed in one of claim 17, wherein the moving rig contains, parallel to the axis of the coils, feedthroughs (17) made of soft ferromagnetic material.
19. The motor as claimed in claim 6, wherein two consecutive phases share a common magnet.
20. The motor as claimed in claim 6, wherein the moving rig is supplied with DC current and that the means for switching the current are mounted on the moving rig.

FLUX SWITCHING LINEAR MOTOR

Abstract of the Disclosure

A flux-switching linear motor with at least two phases P1, P2, P3 has a moving rig, two permanent magnets 9, 10 and a switching mechanism. The moving rig 1 has at least two field coils 7. Each field coil 7 surrounds a magnetic armature 8 defining moving magnetic poles. The two permanent magnets 9, 10 are magnetized in opposite directions, transverse to the axis of a guidance stator tube 1. The stator tube 1 has magnetic poles 2 disposed along at least one of its walls so as to be successively facing the moving magnetic poles during the travel of the moving rig. The switching mechanism switches the direction of the current in the coils. The permanent magnets 9, 10 are disposed outside the coils and magnetized along an axis parallel to the axis of the coil. The stator magnetic poles include pieces 2 made of magnetic material fixed in a guidance tube made of amagnetic material. The dimension of the magnets as measured along their magnetic axis is chosen so as to create narrow gaps to allow movement of the magnets past the stator poles.

FLUX FITTING LINEAR MOTOR

- The invention relates to a flux-switching linear motor with at least two phases, consisting of a moving rig comprising at least two field coils each surrounding a magnetic armature defining moving magnetic poles and two permanent magnets magnetized in opposite senses, of a guidance stator tube exhibiting magnetic poles disposed along the stator tube, on at least one wall of the stator tube in such a way as to be successively facing the moving magnetic poles during the travel of the moving rig, and of means for switching the sense of the current in the coils.
- Most of the known linear motors consist of a moving rig comprising several coils travelling past one or two rows of permanent magnets carried by a rail. Such a motor is described for example in patent application EP 0 161 677. In this motor, the magnets are disposed, with alternating poles, along the whole of one of the inside faces of an amagnetic member, made of aluminum for example, the succession of magnets defining a spacing of periodic structure. In its simplest form, the moving rig consists of two coils fitted with wipers for the DC current supply thereof, switched by two tracks disposed on the opposite inside face of the member. The coils are offset by a quarter of a spacing and supplied in phase quadrature. According to another embodiment, the moving rig consists of three coils offset by a third of a spacing and supplied with currents offset by 120° .

- Another exemplary embodiment is described in patent application GB 2 233 835. In this embodiment, the moving rig, consisting of three coils, overlaps the fixed magnets disposed in the plane of symmetry of a U-profile member.

These structures therefore require magnets over the entire length of the path of the moving rig, although only some of them are active at a given instant. If high-performance permanent magnets are used, the cost of such an installation is considerable and becomes all the more unacceptable the greater the length of the installation. The use of ferrites would enable this cost to be made tolerable, but at the price of mediocre performance. Moreover, simply reducing the length by sawing the linear rail, in the case of a necessary adaptation on-site, becomes a complex operation which requires the prior dismantling of the magnets and careful cleaning of the entire rail after operation. Another drawback appears when the motor is working in an industrial environment: the metal particles encountered in such an environment are attracted by the magnets and interfere with proper operation of the motor.

The motor described in patent EP 0 667 991 remedies these drawbacks. The guidance tube in which the moving rig travels no longer comprises magnets, but is itself made of a ferromagnetic material and is cut in such a way as to exhibit stator poles disposed in two opposite rows, the poles of one row being offset linearly relative to the poles of the other row. Each phase of the moving rig comprises a field coil surrounding an armature consisting of three pole pieces between which are disposed two permanent magnets of opposite polarities, magnetized along the direction of travel of the moving rig. The stator poles and moving poles are arranged in such a way that in a first of two positions of conjunction of the armature, two first moving poles, each belonging to a respective one of the pole pieces, coincide with two stator poles belonging to two different rows of stator poles, while the other two moving poles are offset with respect to the stator

poles, whereas in the second of the two positions of conjunction, the other two moving poles coincide in turn with stator poles, the first two moving poles being in turn offset with respect to the stator poles.

5

Whereas such a motor has the advantage of comprising no fixed magnets, the tubular form of the stator makes it complex to manufacture as far as the precision required to reduce the size of the gap is concerned. Moreover, the mechanical linking of the moving rig to the driven object requires that the stator tube be split on one of its sides, over its entire length, this impeding its magnetic efficiency. Furthermore, the loads applied to the pole pieces of the armature are asymmetric, thereby engendering one or more torsional couples on the moving rig. This drawback makes it essential to considerably rigidify the structure and/or to increase the gap. It is noted, furthermore, that the magnetic leakages existing between the moving rig and the noncut sides of the stator tube degrade the performance of the motor. Finally, the stator tube opposes the bending operations required in order to produce direct actuators, even in the case of a high radius of curvature.

The aim of the present invention is to remedy the abovementioned drawbacks, that is to say to increase the magnetic efficiency of the stator, to reduce the magnetic leakages and to make it possible to produce curves by bending the guidance stator tube.

30

The linear motor according to the invention is characterized in that the permanent magnets are disposed outside the coils of the moving rig and that they are magnetized along an axis parallel to the axis of the coil, and in that the stator magnetic poles consist of pieces made of magnetic material fixed in a guidance tube made of amagnetic material, the dimension

of the magnets as measured along their magnetic axis being chosen in such a way as to create narrow gaps for the movement of the magnets past the stator poles.

- 5 The stator pole pieces are preferably disposed pairwise, on either side of the axis of the guidance tube, and the dimension of the permanent magnets as measured along their magnetic axis corresponds to the distance separating two opposite stator pole pieces.
- 10 This disposition has the advantage of eliminating the torsional couple on the moving rig.

- According to two embodiments of the invention, the magnets of opposite polarity are disposed
- 15 symmetrically, either (variant 1) with respect to a plane containing the axis of the coil and a perpendicular to the direction of the stator tube, or (variant 2) with respect to a plane containing the axis of the coil and the axis of the stator tube.

- 20 The guidance tube can consist of a U-profile member, as in the case of linear motors with fixed magnets, thereby making it possible to link the moving rig mechanically to a driven object without prejudicing
- 25 performance. The loads on the moving rig are perfectly symmetrical so that there is no torsional couple. Consequently, modest guidance is sufficient to keep the moving rig in the central position in the guidance tube during its motion. Furthermore, nothing prevents the
- 30 two or three phases from being articulated either via a ball and socket joint, or simply by utilizing the link between the pairs of alternating magnets in direct contact, in the case of variant 1. A modest gap between two phases, created by a central stud, allows a
- 35 rotation of one of the phases with respect to the other. In this case, two neighboring field coils are linked by two magnets of opposite polarities.

According to a simplified embodiment, the stator pole pieces are disposed on a single wall of the guidance stator tube and the moving rig is equipped with a magnetic short-circuit plate on the opposite side from
5 the stator pole pieces. The effect of this plate is to create an image of the stator poles.

The neighboring coils may share a common magnet. For a three-phase setup, according to variant 1 or according
10 to the simplified embodiment, the two common magnets are then polarized in opposite senses.

In all cases, the switching of the current in the field coils can be achieved through an AC or DC current
15 supply, as described in the prior art, in particular in patent EP 0 667 991. The switching can be achieved by conducting tracks of suitable shape, as described in patent EP 0 161 677 or be achieved by a switching device mounted on the moving rig, as described in
20 patent EP 0 667 991.

The appended drawing represents, by way of example, a few embodiments of the motor according to the
25 invention.

Figure 1 is a perspective view of a stator tube member in which there travels a moving rig, only a single phase of which has been represented, according to
30 variant 1.

Figure 2 is an exploded depiction of Figure 1.

Figure 3 is an end-on view of Figure 1, along the axis of the stator tube.

35 Figures 4A to 4D illustrate the principle of switching the flux in a phase.

Figure 5 schematically represents, for a three-phase motor in which each phase is fitted with two distinct permanent magnets, a dynamic sequence of successive positions offset by $1/6$ of a spacing and the corresponding distribution of the flux in the three phases.

Figure 6 is a similar representative view for a three-phase motor in which the phases have a permanent magnet in common.

Figure 7 is a front view, in a plane parallel to that of the stator lugs, of a moving rig according to a second embodiment.

Figures 8a to 8e represent the moving rig of Figure 7 and the stator lugs, in five successive positions of the moving rig.

Figure 9a represents a simplified embodiment, with a disposition of the stator lugs on a single face of the stator tube.

Figure 9b illustrates the mirror effect obtained in the embodiment according to Figure 9a.

Figure 10 represents a two-phase embodiment, according to variant 2, viewed from the front in a plane parallel to that of the lugs.

Figures 11a to 11c represent the moving rig of Figure 10 and the stator lugs, in three successive positions of the moving rig.

Figure 12 represents a variant of the disposition of the stator lugs used in Figure 11.

We refer to Figures 1 to 3.

The motor represented comprises a stator tube 1 consisting of a U-profile amagnetic guidance member of rectangular section, made for example of aluminum. It could also be made of a synthetic material, since it serves merely as support to the stator poles consisting of pads or of rectangular lugs 2 made of ferromagnetic material, soft steel for example. These pads 2 are held by tight engagement in pairs of opposite grooves 3, 4 formed in the member 1 in such a way as to be fixed against the internal faces of the two parallel opposite legs of the U-profile member. The pads 2 are positioned pairwise, such that the two pads of a pair are situated one facing the other, symmetrically with respect to the axis of the member 1. The successive pairs of pads 2 are equidistant and spaced apart by a distance defining the spacing of the motor. In its transverse wall, the tube 1 furthermore has two additional grooves 5 and 6 for guiding the moving rig, as will be described later. These grooves 5 and 6 may be coated in a material facilitating the sliding of the moving rig.

The moving rig comprises two or three phases, such as the phase P1 represented in Figures 1 to 3, each of these phases consisting, in principle, of a coil 7 whose axis is perpendicular to the plane of the stator poles 2, this coil surrounding a core 8 made of magnetic material constituting the armature. Disposed on each side of the coil 7, along the axis of the stator tube 1, are two permanent magnets 9 and 10 magnetized in opposite senses parallel to the axis of the coil. Fixed at the two ends of the coil 7 are two rectangular flanges 11 and 12 made of amagnetic material, preferably of synthetic material, collaborating in the fixing of the permanent magnets 9 and 10. The core 8 and the permanent magnets 9 and 10

exhibit substantially the same square section viewed along the axis of the stator tube 1 and they are aligned along this axis. Viewed from the side, the core 8 and the magnets 9 and 10 exhibit a rectangular section whose width can vary depending on the embodiment. A two-phase moving rig consisting of two phases such as P1 juxtaposed and a three-phase moving rig consisting of three phases such as P1 juxtaposed.

As may be seen in Figure 3, the moving rig is guided in the tube 1 by its two flanges 11 and 12 sliding in the grooves 5 and 6. The distance between the permanent magnets 9 and 10 or the core 8 and the stator poles 2 defines two gaps e1 and e2.

Figures 4A to 4D illustrate the principle of the motor according to the invention, in variant 1 thereof.

In the position represented in Figure 4A, the core 8 is situated between a pair of stator poles 2, the neighboring pairs being situated at distances such that the permanent magnets 9 and 10 are not engaged between these neighboring pairs. The magnetic fields of the two permanent magnets 9 and 10 tend to close up through the neighboring stator poles 2 of the core 8 and through this core 8. These two fields being equal and opposite, the magnetic flux in the core 8 is zero.

If the moving rig is displaced toward the right so as to be in the position represented in Figure 4B, it is noted that in this position the main flux in the core 8 originates from the permanent magnet 10 near the stator poles 2. This flux passes through the coil 7 in the first sense indicated by the small curved arrows.

By continuing to displace the moving rig toward the right, the position represented in Figure 4C is

reached, in which the coil 7 is situated exactly midway between two pairs of stator poles 2, the permanent magnet 9 being between the two stator poles of one pair and the magnet 10 between the stator poles of the neighboring pair. In this position, the resultant flux in the coil is again zero.

By continuing to displace the moving rig toward the right, the position represented in Figure 4D is reached, this being the position symmetric with the position represented in Figure 4B. In this position, the main flux now originates from the magnet 9 which flows in the direction indicated by the small curved arrows. This flux passes through the coil 7 via the core 8 in a second sense opposite to that of the position represented in Figure 4B.

The displacement of the coil between the magnetic pieces 2 therefore makes it possible to obtain an alternating electromotive force.

The field of the magnet 9 in Figure 4B and that of the magnet 10 in Figure 4D produces an unwanted flux in the core 8 which constitutes a magnetic loss. The distance between the poles of the magnet 9 in Figure 4B and the ends of the core 8 on the one hand and the stator pole pieces 2 through which the main flux passes is however relatively large, so that the loss is very small, unlike what occurs in the structure according to patent EP 0 667 991. By using lugs beveled on the opposing edges it is possible for magnetic losses to be further limited.

The juxtaposition of two or three moving rigs, as is represented in Figures 1 to 3, and schematically, in Figures 4A to 4D, makes it possible to produce a two-phase or three-phase motor, respectively.

A three-phase motor is represented schematically in Figure 5. It consists of three phases P1, P2 and P3 the axes of whose coils are respectively offset by $1/3$ of a spacing and $2/3$ of a spacing relative to the stator spacing defined by the distance between two successive pairs of stator poles. The distance between the axes of two neighboring coils is therefore equal to $4/3$ of a spacing. In the case of a two-phase motor, the axes of the coils would be offset respectively by $1/4$ of a spacing relative to the stator spacing. Obviously, these offsets are given to within an integer number of spacings, and it is possible to add a half-spacing thereto or subtract a half-spacing therefrom, simply by reversing the current in the relevant coil.

Figure 5 represents a dynamic sequence of the six positions offset by $1/6$ of a spacing and the corresponding distribution of the flux in the three phases. The signs +, -, o appearing on the right of each sequence indicate the presence of a flux in the core of each phase and its sense, in the absence of current. Thus, for example, -/+ / o signifies that in phase P1 there is a "negative" flux directed downward, for P2 a "positive" flux directed upward and for P3 a zero flux, and so on.

As is done in any DC machine, the current in a coil is reversed at the moment at which the induced electromotive force vanishes and changes sense, that is to say at the moment at which the flux in this coil is a maximum, in one sense or the other. As in patent EP 0 667 991, each phase can be equipped with a pair of wiper contacts travelling over supply tracks made of copper printed on an insulating support mounted in the bottom of the stator tube 1, that is to say between the grooves 5 and 6. These tracks are supplied with DC current and switching can be achieved through the

shape, in the form of nested recesses, of the two tracks, as represented and described in patent EP 0 161 677. It is also possible to supply the coils via two continuous straight conductor rails and to achieve switching by means of a switching device mounted in each of the phases of the moving rig, as described in patent EP 0 667 991 and as is known to the person skilled in the art. Special-purpose electronic circuits readily allow such control, based on the state of Hall-effect sensors mounted directly on the moving rig, for example the MC33033 integrated circuit from Motorola.

The structure of the stator tube alone makes it possible to produce curves by bending the tube 1. In the moving rig, the three phases of the motor represented in Figure 5 can be articulated together in such a way as to facilitate the uptake of curve. This articulation 14 can be effected via a ball and socket joint or quite simply by utilizing the magnetic link between the alternating pairs of magnets in direct contact, by leaving a modest gap between two neighboring phases, which gap is caused by a central stud allowing rotation of one phase with respect to the other.

If the moving rig does not need to be articulated, it can be simplified as represented in Figure 6 which represents a sequence in a similar manner to Figure 5. In this embodiment the magnets 9 and 10 linking two phases together are replaced by a common magnet 13 whose sense of magnetization is respectively opposite to the sense of magnetization of the nearest exterior magnet, the polarities of the magnets 13 consequently being mutually opposite, as is apparent in Figure 6. To recover operation similar to that of the embodiment represented in Figure 5, the connections of the coil of

phase P2 should be reversed, as emerges from the flux distribution indicated for each of the positions of the sequence. It is clear that this disposition with common magnet prevents a considerable leakage flux between
5 directly neighboring reverse-polarized magnets.

In the embodiment represented in Figures 1 to 3 the moving rig could obviously be fitted with rollers running in the grooves 5 and 6.

10

The practical embodiment of a linear motor according to the invention is accompanied by alterations suitable for optimizing its performance. Figure 7 and Figures 8a to e show a device with two-phase moving rig, now
15 viewed from the front, in a plane parallel to that of the lugs.

For the sake of convenience and use of standard components, the magnets 9' are here cylindrical, each
20 of the previous rectangular magnets being replaced by a pair of magnets, crimped into a casing 15. By convention, a dark face will be said to correspond to a North pole.

25 The coils 7' are also cylindrical, as are their cores 8', but a pole shoe 16, elongate in a direction perpendicular to the motion, is advantageously disposed on either side of each coil/core assembly. This shoe ensures the dual function of collecting the flux
30 transmitted by the lugs 2, and of mechanically holding the coil in the casing 15.

Finally, it is very advantageous to dispose, parallel to the axis of the magnets and of the cores and with
35 the same length, soft steel magnetic pads 17, intended to ensure the correct flow of the flux of the magnets which are not in a position of linkage with a coil core

at a given instant. Like magnets and coils, these pads 17 pass right through the casing 15.

Figure 8a represents the moving rig facing a row of stator lugs 2, in an initial position. For greater ease of viewing, the lugs 2 here have an exaggerated height: it is amply sufficient that they overlap the magnets, and any superfluous height is manifested as an increase in the magnetic leakages from lug to lug.

Because of the respective positions of the moving rig and of the lugs, it is noted that the coil of phase P1 is, ideally, completely traversed by the flux of the South magnets situated to its right, while the North magnets situated to its left have their flux closed up by the left end pad 17. At the same instant, the flux in phase P2 is zero.

An instant later, in Figure 8b, the flux in P1 has decreased, while the flux in P2 increases, arising from the North magnets situated to its right.

The instant of Figure 8c is magnetically offset by a quarter of a spacing with respect to 8a: the flux is now zero in P1, while it is a maximum in P2. And so on and so forth: immediately afterwards, the flux in P1 originates chiefly from the North magnets situated to its left.

It is noted that this disposition of the elements makes it possible both to overlap magnets and cores during a conjunction, and to prevent a situation of quasi-zero flux from lasting too long.

Finally, all the embodiments described in the patent suit a simplified version, represented in Figure 9a, with a single row of stator lugs 2, and a magnetic

short-circuit or flux closure plate 18, secured to the moving rig, on the side where the stator lugs are omitted. This disposition has the advantage of greater simplicity of production, especially when bending. On the other hand, there is no longer as previously balancing of loads, hence the need for more careful guidance, especially with the aid of casters. From the magnetic standpoint, such a magnetic short-circuit 18 is known to play the role of mirror. Everything occurs as if there were still a double row of stator lugs 2, but with a distance at least twice the width of the moving rig as is illustrated in Figure 9b, where the image lugs 2' are represented dashed.

Figure 10 now represents a moving rig according to the second variant of the invention. The magnets of like polarity are now disposed on the same side of the plane defined by the axis of the coils and the axis of the stator tube. On taking as orientations those defined by the sheet, the magnetic flux which on average previously flowed horizontally, originating from the magnets situated either on the left or on the right of the coil, will now be said to flow on average vertically, originating from the magnets situated either above or below the coil. As previously, it is the disposition of the stator lugs which favors one or other sense of flow of the resultant flux in the core.

The principle of variant 2 is sufficiently close to that of variant 1 as to be capable of direct illustration in a two-phase embodiment, here one which is particularly compact in the direction of motion. In Figure 10, the two coils 9'' are separated by three quarters of a stator spacing. No pole shoe is used on the cores 8 of the coils. Two lateral flux closure elements 17 are used, here in cylindrical form.

Figures 11a to 11c illustrate the manner of operation of this variant 2 in the presence of stator lugs 2''. The latter have a T shape which minimizes the lug-to-lug leakages, as would likewise a triangular shape, and are again disposed pairwise, symmetrically on either side of the plane parallel to the lugs and containing the axis of the stator tube. There are now two pairs of stator lugs 2'' per spacing: the lugs are oriented alternately upward and downward every half-spacing.

Because of the respective positions of the moving rig 15 and of the stator lugs 2'', it is noticed in Figure 11a that the coil of phase P1 is, ideally, completely traversed by the flux of the South magnets situated below, while the North magnet situated above and to the left has its flux closed up partially by the left end auxiliary cylinder 17. At the same instant, the flux in phase P2 is zero, both on account of symmetry and because the core of the coil of P2 tends to become short-circuited by the magnets which lie to the top left and bottom right of P2.

A quarter of a spacing later, in Figure 11b, the flux in P1 has become zero, while the flux in P2 is a maximum, arising from the South magnets situated below.

The instant of Figure 11c is offset by half a spacing with respect to 11a: the flux is now zero in P2, whereas it is a maximum in P1, now originating from the North magnets situated above. And so on and so forth.

It will be observed that variant 2 allows the sharing of common magnets between consecutive phases. In the limit, the top and bottom magnets could be two individual rectangular magnets placed above and below (in the drawing) the coils, that is to say on each side

of the coils when referring to the direction of travel of the moving rig.

Likewise, in principle this variant permits a link up
5 of all the upper stator lugs and of all the lower (in the drawing) stator lugs: there would then be, on each of the stator faces used, two pieces in the form of nested combs. This linking of the lugs would not however be used, owing to the appreciable increase in
10 magnetic leakages which it brings about.

Finally, it is possible to apply the alterations relating to variant 1 to variant 2, especially the use of a magnetic short-circuit on one face of the moving
15 rig so as to use just one face of the stator member.

Finally, Figure 12 illustrates one of the countless embodiments inspired by the invention. This is a variant of the previous case, but this time the stator
20 lugs 2'' and 2''' of one and the same pair are symmetric with respect to the axis of the stator tube. The lugs 2'' belonging to the same face of the stator tube have been represented with thick lines and the lugs 2''' belonging to the opposite phase have been
25 represented with thin lines. To make viewing easier, the coils are represented only by their core 8. Phase P1 is in a position of maximum flux. It is observed that the flux of one pair of magnets passes through the core and then the pair of magnets of opposite polarity,
30 this time in series with the previous pair, before closing up here in the air, which will give it a small value. A three-phase embodiment allows the flux to close up through the core of the other two coils. However, the lengthening of the flux lines according to
35 such a magnetic circuit is detrimental to the flux value obtained.

Variant 1 also allows the magnets of alternate polarity to be placed in series by using for example diagonally arranged lugs, of opposite direction on the two faces of the stator tube. However, here again the fluxes
5 obtained are too small to justify the use of this disposition.

It is clear that any degraded version of the embodiments presented here is covered by the invention,
10 such as for example the use of a single stator face without there being any magnetic short-circuit on the moving rig, or else the use of soft steel elements in partial substitution for the magnets, or else the making of an equivalent of the two top and bottom
15 magnets of variant 2 through a single magnet, perpendicular to the axis of the coils and to the axis of the stator tube, associated with pole pieces, or a geometry and disposition of the lugs bringing about the placement in series of the magnets of alternate
20 polarity and hence a lengthening of the paths of the fluxes.

Claims


1. A flux-switching linear motor with at least two phases (P1, P2, P3), consisting of a moving rig comprising at least two field coils (7) each surrounding a magnetic armature (8) defining moving magnetic poles and two permanent magnets (9, 10) magnetized in opposite senses, of a guidance stator tube (1) exhibiting magnetic poles (2) disposed along the stator tube, on at least one wall of the stator tube in such a way as to be successively facing the moving magnetic poles during the travel of the moving rig, and of means for switching the sense of the current in the coils, characterized in that the permanent magnets (9, 10) are disposed outside the coils and in that they are magnetized along an axis parallel to the axis of the coil, and in that the stator magnetic poles (2) consist of pieces made of magnetic material fixed in a guidance tube made of amagnetic material, the dimension of the magnets as measured along their magnetic axis being chosen in such a way as to create narrow gaps for the movement of the magnets past the stator poles.
2. The motor as claimed in claim 1, characterized in that the pole pieces (2) constituting the stator poles are fixed pairwise, on either side of the axis of the guidance tube (1), on two opposite walls of the stator tube and in that the dimension of the magnets (9, 10) corresponds to the distance separating two opposite stator pole pieces.
3. The motor as claimed in claim 2, characterized in that the magnets of opposite polarity which relate to a phase are disposed symmetrically with respect to the plane containing the axis of the coil and a

perpendicular to the axis of the stator tube, that is to say disposed in front of and behind the coil in the direction of motion.

- 5 4. The motor as claimed in claim 2, characterized in that the magnets of opposite polarity which relate to a phase are disposed symmetrically with respect to the plane containing the axis of the coil and the axis of the stator tube.
- 10 5. The motor as claimed in one of claims 2 to 4, characterized in that the guidance tube (1) consists of a rectangular U-profile member on two opposite internal walls of which are fixed lugs or
- 15 pads (2) made of magnetic material constituting the stator poles.
- 20 6. The two-phase motor with two coils as claimed in one of claims 1 to 5, characterized in that the axes of the coils are offset by a quarter or three quarters of a spacing relative to the stator spacing defined by the distance between the positions of two consecutive stator pole pieces.
- 25 7. The three-phase motor with three coils as claimed in one of claims 1 to 5, characterized in that the axes of the coils are offset by a third or two thirds of a spacing relative to the stator spacing defined by the distance between the positions of
- 30 two consecutive stator pole pieces.
- 35 8. The motor as claimed in one of claims 2 to 5, characterized in that the subassemblies constituting each of the phases are articulated (14) together.


9. The motor as claimed in one of claims 1 to 7, characterized in that two consecutive phases share a common magnet.
- 5 10. The motor as claimed in one of claims 1 to 9, characterized in that the moving rig is supplied with DC current and that the means for switching the current are mounted on the moving rig.
- 10 11. The motor as claimed in one of claims 1 to 10, characterized in that the moving rig contains, parallel to the axis of the coils, feedthroughs (17) made of soft ferromagnetic material.
- 15 12. The motor as claimed in claim 1, characterized in that the moving rig comprises a magnetic short-circuit plate made of a soft ferromagnetic material (18) disposed on the face of the moving rig parallel and opposite to the stator poles (2)
- 20 in such a way as to create an image (2') of the stator poles.

- 1/7 -

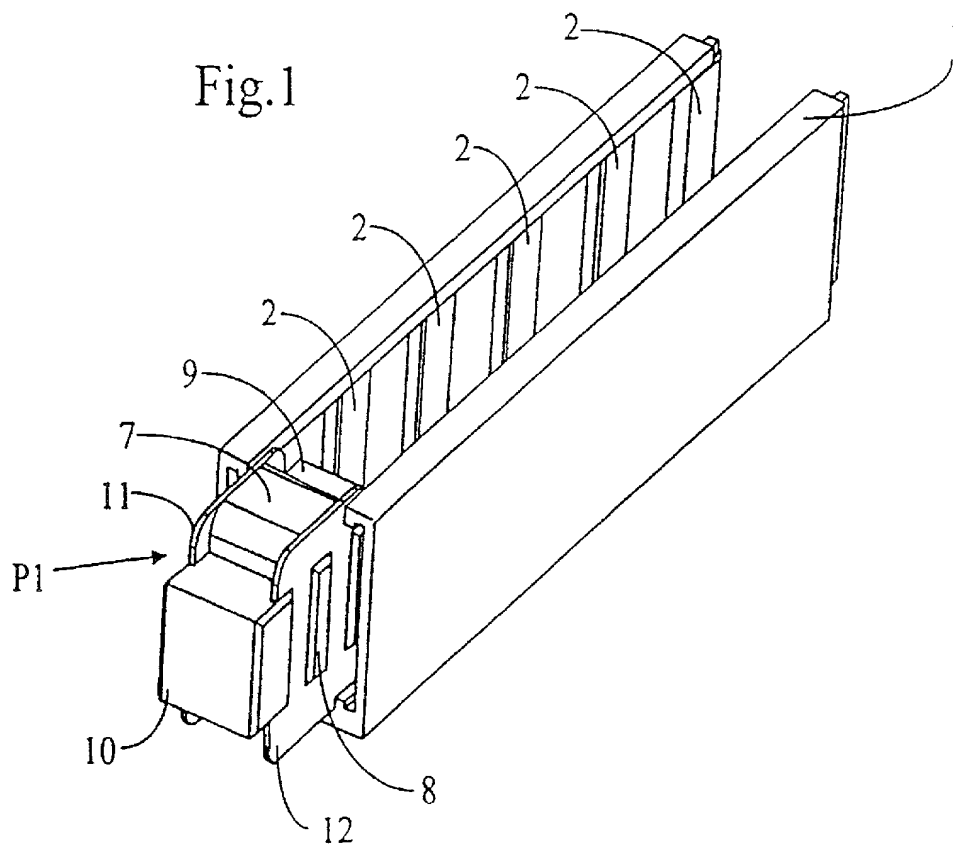

- 2/7 -

Fig.2

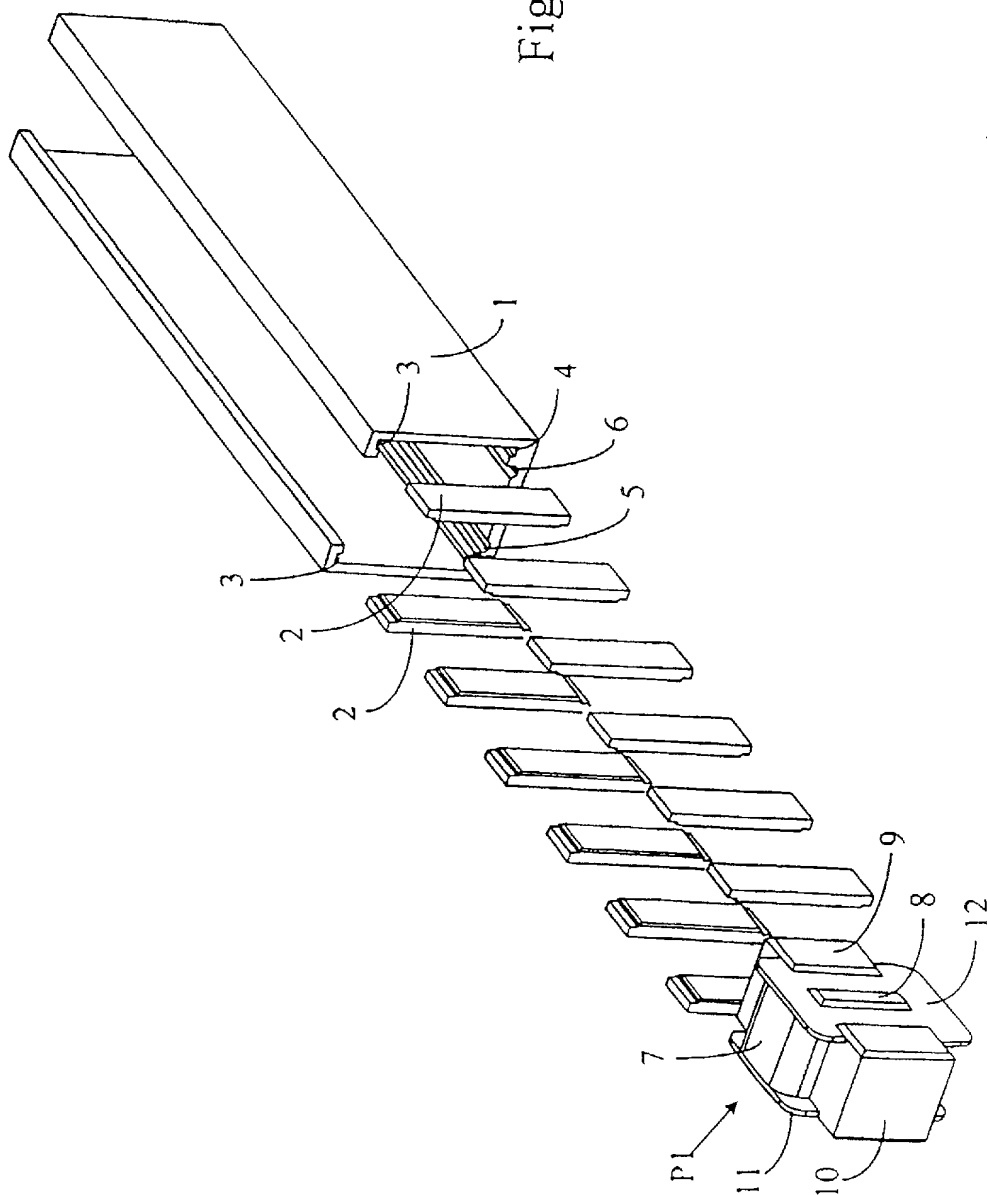

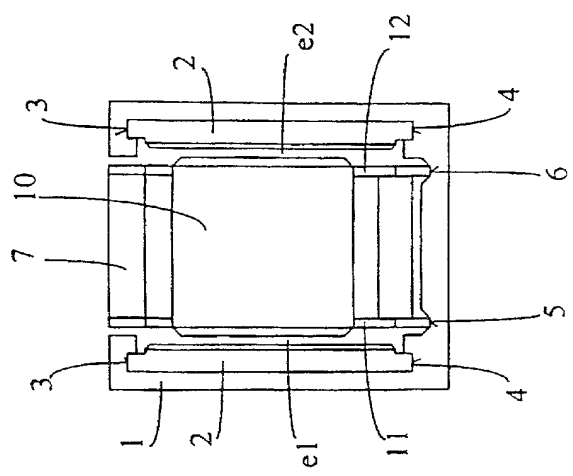


Fig.3




Fig.4A




Fig.4B




Fig.4C

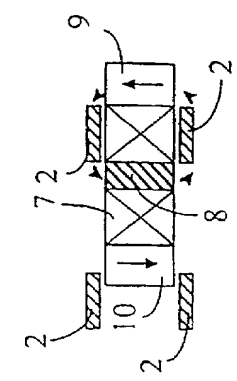


Fig.4D

- 4/7 -

Fig.5


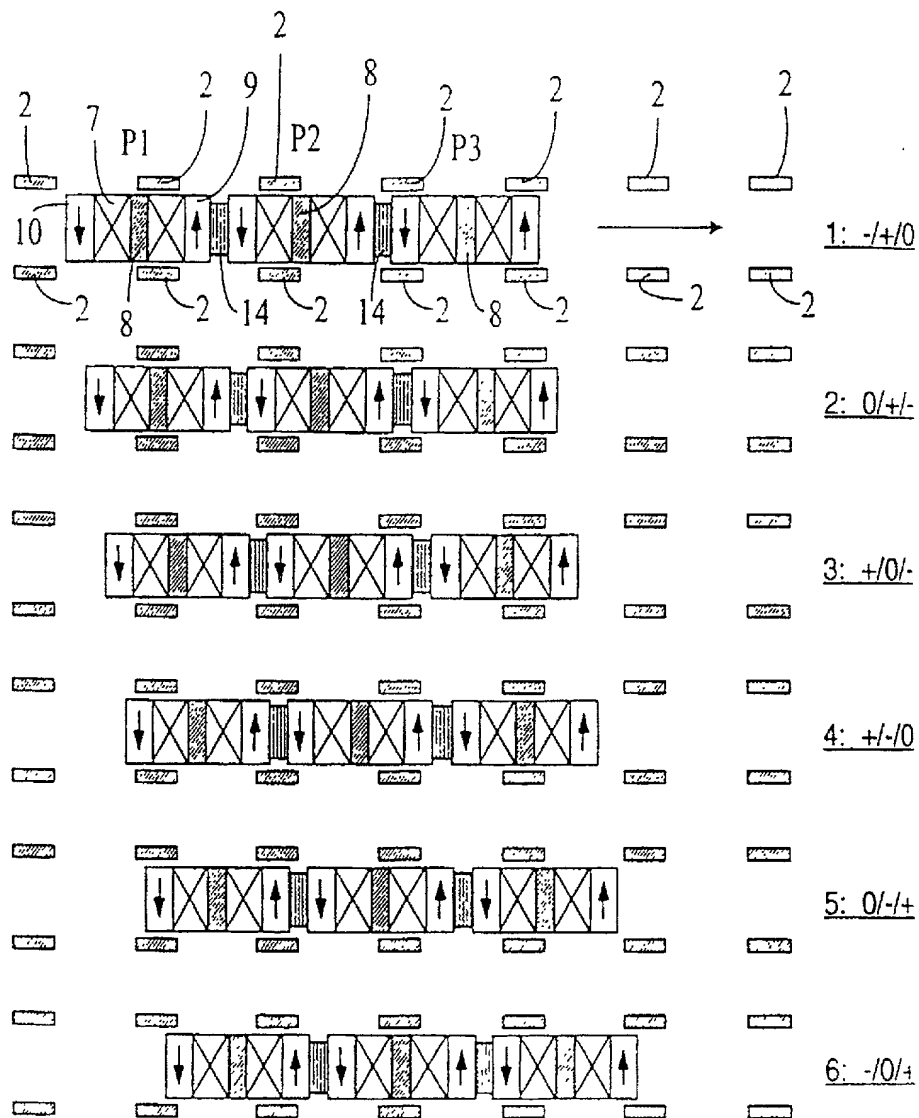


Fig.6

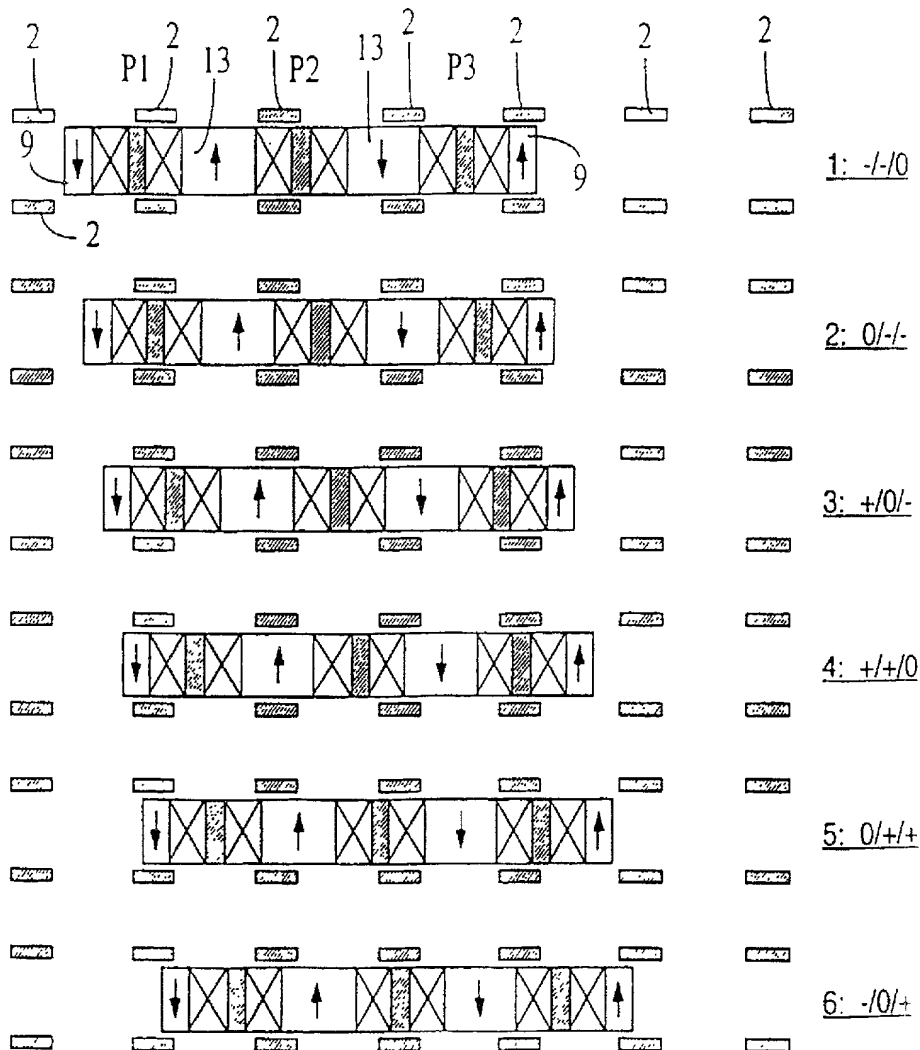

- 6/7 -

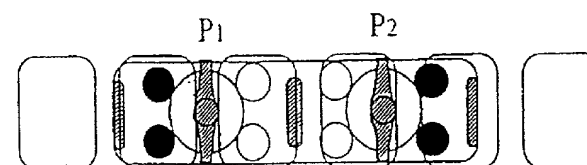
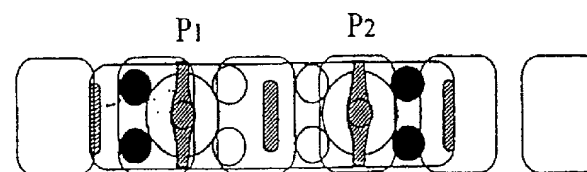
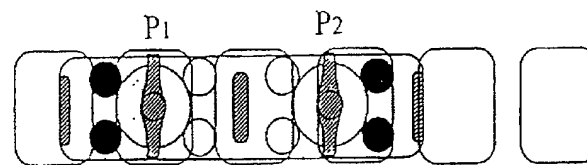
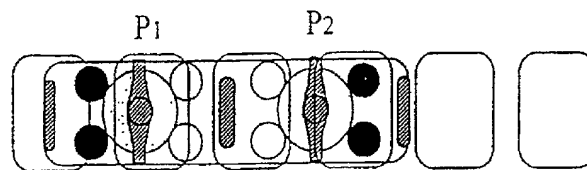
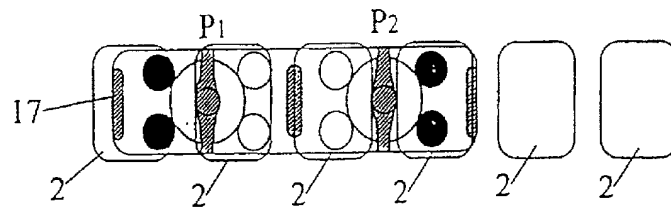
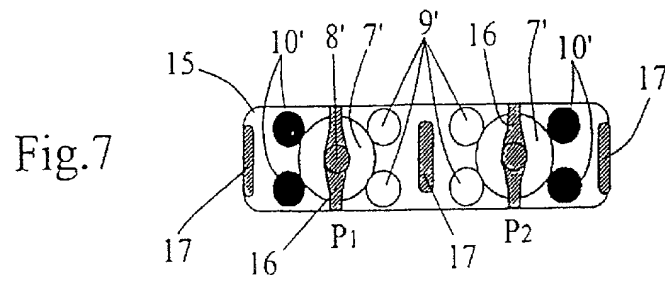


Fig.9a

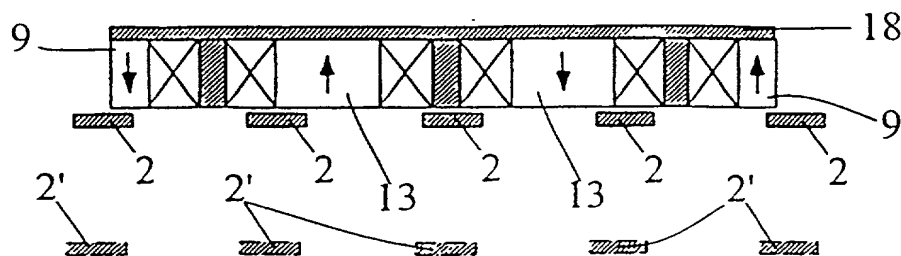


Fig.9b

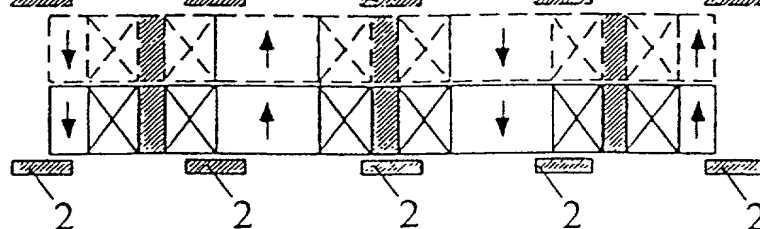


Fig.10

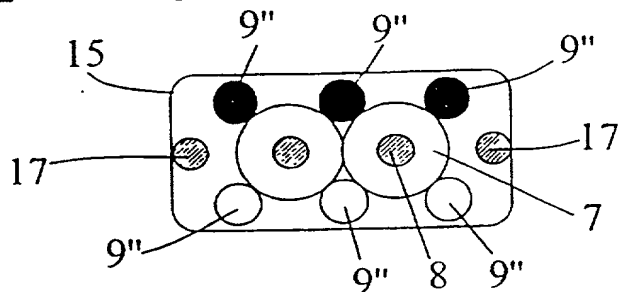


Fig.11a

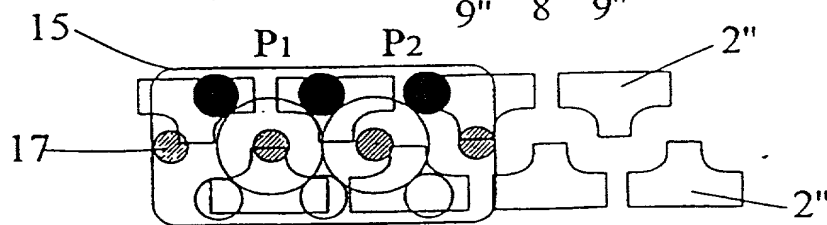


Fig.11b

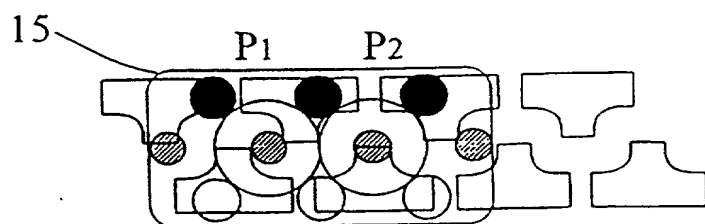


Fig.11c


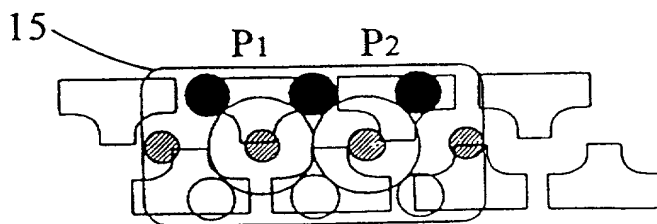


Fig.12

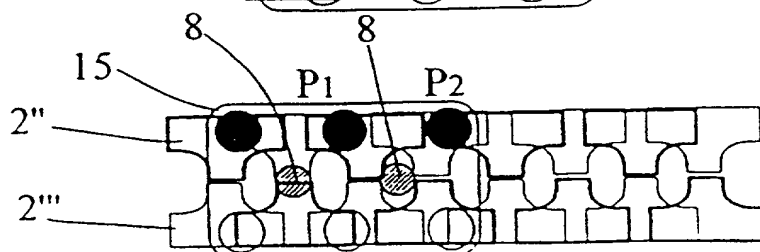

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

DECLARATION ET POUVOIRS POUR DEMANDE DE BREVET

FRENCH LANGUAGE DECLARATION

En tant que l'inventeur nommé ci-après, je déclare par le présent acte que :

As a below name inventor, I hereby declare that :

Mon domicile, mon adresse postale et ma nationalité sont ceux figurant ci-dessous à côté de mon nom.

My residence, post office address and citizenship are as stated next to my name.

Je crois être le premier inventeur original et unique (si un seul nom est mentionné ci-dessous), ou l'un des premiers co-inventeurs originaux (si plusieurs noms sont mentionnés ci-dessous) de l'objet revendiqué, pour lequel une demande de brevet a été déposée concernant l'invention intitulée

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

Moteur linéaire à commutation de flux.

Linear motor.

et dont la description est fournie ci-joint à moins que la case suivante n'ait été cochée:

the specification of which is attached hereto unless the following box is checked:

☐ a été déposée le _____
sous le numéro de demande des Etats-Unis ou le
numéro de demande international PCT _____
et modifiée le _____
(le cas échéant).

☐ was filed on _____
as United States Application Number of PCT
International Application Number _____
and was amended on _____
(if applicable)

Je déclare par le présent acte avoir passé en revue et compris le contenu de la description ci-dessus, revendications comprises, telles que modifiées par toute modification dont il aura été fait référence ci-dessus.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

Je reconnais devoir divulguer toute information pertinente à l'abrevetabilité, comme défini dans le titre 37, § 1.56 du Code fédéral des réglementations.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56

French Language Declaration

Je revendique par le présent acte avoir la priorité étrangère, en vertu du Titre 35, § 119(a)-(d) ou § 365(b) du Code des Etats-Unis, sur toute demande étrangère de brevet ou certificat d'inventeur ou en vertu du Titre 35, § 365(a) du même code, sur toute demande internationale PCT désignant au moins un pays autre que les Etats-Unis et figurant ci-dessous et, en cochant la case, j'ai aussi indiqué ci-dessous toute demande étrangère de brevet, tout certificat d'inventeur ou toute demande internationale PCT ayant une date de dépôt précédant celle de la demande à propos de laquelle une priorité est revendiquée.

Prior foreign application(s)
Demande(s) de brevet antérieure(s)

_____ (Number) (Numéro)	_____ (Country) (Pays)
-------------------------------	------------------------------

_____ (Number) (Numéro)	_____ (Country) (Pays)
-------------------------------	------------------------------

Je revendique par le présent acte tout bénéfice, en vertu du Titre 35, § 119(e) du Code des Etats-Unis, de toute demande de brevet provisoire effectuée aux Etats-Unis et figurant ci-dessous.

_____ (Application No.) (N° de demande)	_____ (Filing Date) (Date de dépôt)
---	---

_____ (Application No.) (No de demande)	_____ (Filing Date) (Date de dépôt)
---	---

Je revendique par le présent acte tout bénéfice, en vertu du Titre 35, § 120 du Code des Etats-Unis, de toute demande de brevet effectuée aux Etats-Unis, ou en vertu du Titre 35, § 365(c) du même Code, de toute demande internationale PCT désignant les Etats-Unis et figurant ci-dessous et, dans la mesure où l'objet de chacune des revendications de cette demande de brevet n'est pas divulgué dans la demande antérieure américaine ou internationale PCT, en vertu des dispositions du premier paragraphe du Titre 35, § 112 du Code des Etats-Unis, je reconnais devoir divulguer toute information pertinente à la brevetabilité, comme défini dans le Titre 37, § 1.56 du code fédéral des réglementations, dont j'ai pu disposer entre la date de dépôt de la demande antérieure et la date de dépôt de la demande nationale ou internationale.

I hereby claim foreign priority under Title 35, United States Code, § 119(a)-(d) or § 365 (b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below, and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Claimed on all applications identified below, except those which are checked in the box
Droit de priorité revendiqué pour les demandes identifiées ci-dessous, sauf celles mentionnées par une croix

_____ (Day/Month/Year Filed) (Jour/Mois/année de dépôt)	<input type="checkbox"/>
---	--------------------------

_____ (Day/Month/Year Filed) (Jour/Mois/année de dépôt)	<input type="checkbox"/>
---	--------------------------

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below.

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s), or § 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application.

(Application No.)
(No de demande)

(Filing Date)
(Date de dépôt)

(Status) (patented, pending, abandoned)
(Status) (breveté, en cours d'examen, abandonné)

(Application No.)
(No de demande)

(Filing Date)
(Date de dépôt)

(Status) (patented, pending, abandoned)
(Status) (breveté, en cours d'examen, abandonné)

Je déclare par le présent acte que toute déclaration ci-incluse est, à ma connaissance, véridique et que toute déclaration formulée à partir de renseignements ou de suppositions est tenue pour véridique; et de plus, que toutes ces déclarations ont été formulées en sachant que toute fausse déclaration volontaire ou son équivalent est passible d'une amende ou d'une incarcération, ou des deux, en vertu de la Section 1001 du Titre 18 du Code des Etats-Unis, et que de telles déclarations volontairement fausses risquent de compromettre la validité de la demande de brevet ou du brevet à partir de celle-ci.

Je/Nous accepte (ons) par le présent acte qu'en cas de litige relatif à tout service rendu par un avocat ou un agent au service de Bugnion S.A., Genève/Suisse, ce litige ou différend soit réglé par les autorités judiciaires du Canton de Genève / Suisse, et par l'application du droit suisse (à l'exclusion de toutes dispositions légales pouvant désigner un autre for et/ou un autre droit applicable).

Je / Nous consens (tons), par ailleurs, à ce que toute action en justice résultant uniquement d'un litige relatif aux services rendus par un avocat désigné ou un agent établi aux Etats-Unis soit intentée dans la juridiction professionnelle de cet avocat/agent

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

I/We hereby agree that in the event of any dispute regarding any services rendered by an attorney or agent working for BUGNION S.A. in Geneva, Switzerland, such dispute or litigation shall be resolved in the Canton of Geneva, Country of Switzerland and Swiss Law (excluding its conflict of Laws provisions) shall apply. Further, I/we hereby agree that any lawsuit filed in any dispute solely involving services rendered by an appointed attorney or agent located in the United States shall be filed in the jurisdiction of that attorney or agent's place of business.

French Language Declaration

POUVOIRS : En tant que l'inventeur cité, je désigne par la présente l'(les) avocat(s) et/ou agent(s) suivant(s) pour qu'ils poursuive(nt) la procédure de cette demande de brevet et traite(nt) toute affaire s'y rapportant avec l'Office des brevets et des marques: (mentionner le nom et le numéro d'enregistrement).

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith: (list name and registration number)

JOHN MOETTELI, REG. NO 35,289

(2)

SHERMAN D. PERNIA, REG. NO 34,404

Adresser toute correspondance à :

Send Correspondence to :

BUGNION S.A., 10, ROUTE DE FLORISSANT, CASE 375, CH-1211 GENEVA 12, SWITZERLAND

Adresser tout appel téléphonique à :
(nom et numéro de téléphone)

Direct Telephone Calls to:
(name and telephone number)

JOHN MOETTELI : 011-4122-704-3684 OR 011-4122-346-8744

FAX : 011-4122-346-8960

E-MAIL : MOETTELI@BUGNION.CH

Nom complet de l'unique ou premier inventeur :

Full name of sole or first inventor

Signature de l'inventeur

Date

Inventor's signature

Date

Domicile

Residence Hameau de Romme

74300 NANCY-SUR-CLUSES - FRANCE

Nationalité

Citizenship

FRENCH

FRX


Adresse postale

Post Office Address

Hameau de Romme

74300 NANCY-SUR-CLUSES - FRANCE

United States Patent & Trademark Office
Office of Initial Patent Examination -- Scanning Division

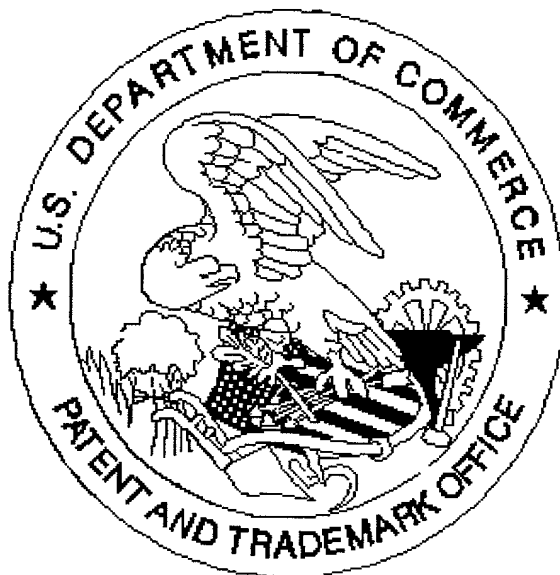

Application deficiencies found during scanning:

☐ Page(s) _____ of _____ were not present
for scanning. (Document title)

☐ Page(s) _____ of _____ were not present
for scanning. (Document title)

** Scanned copy is best available. Declaration page 575 is
not present.*